




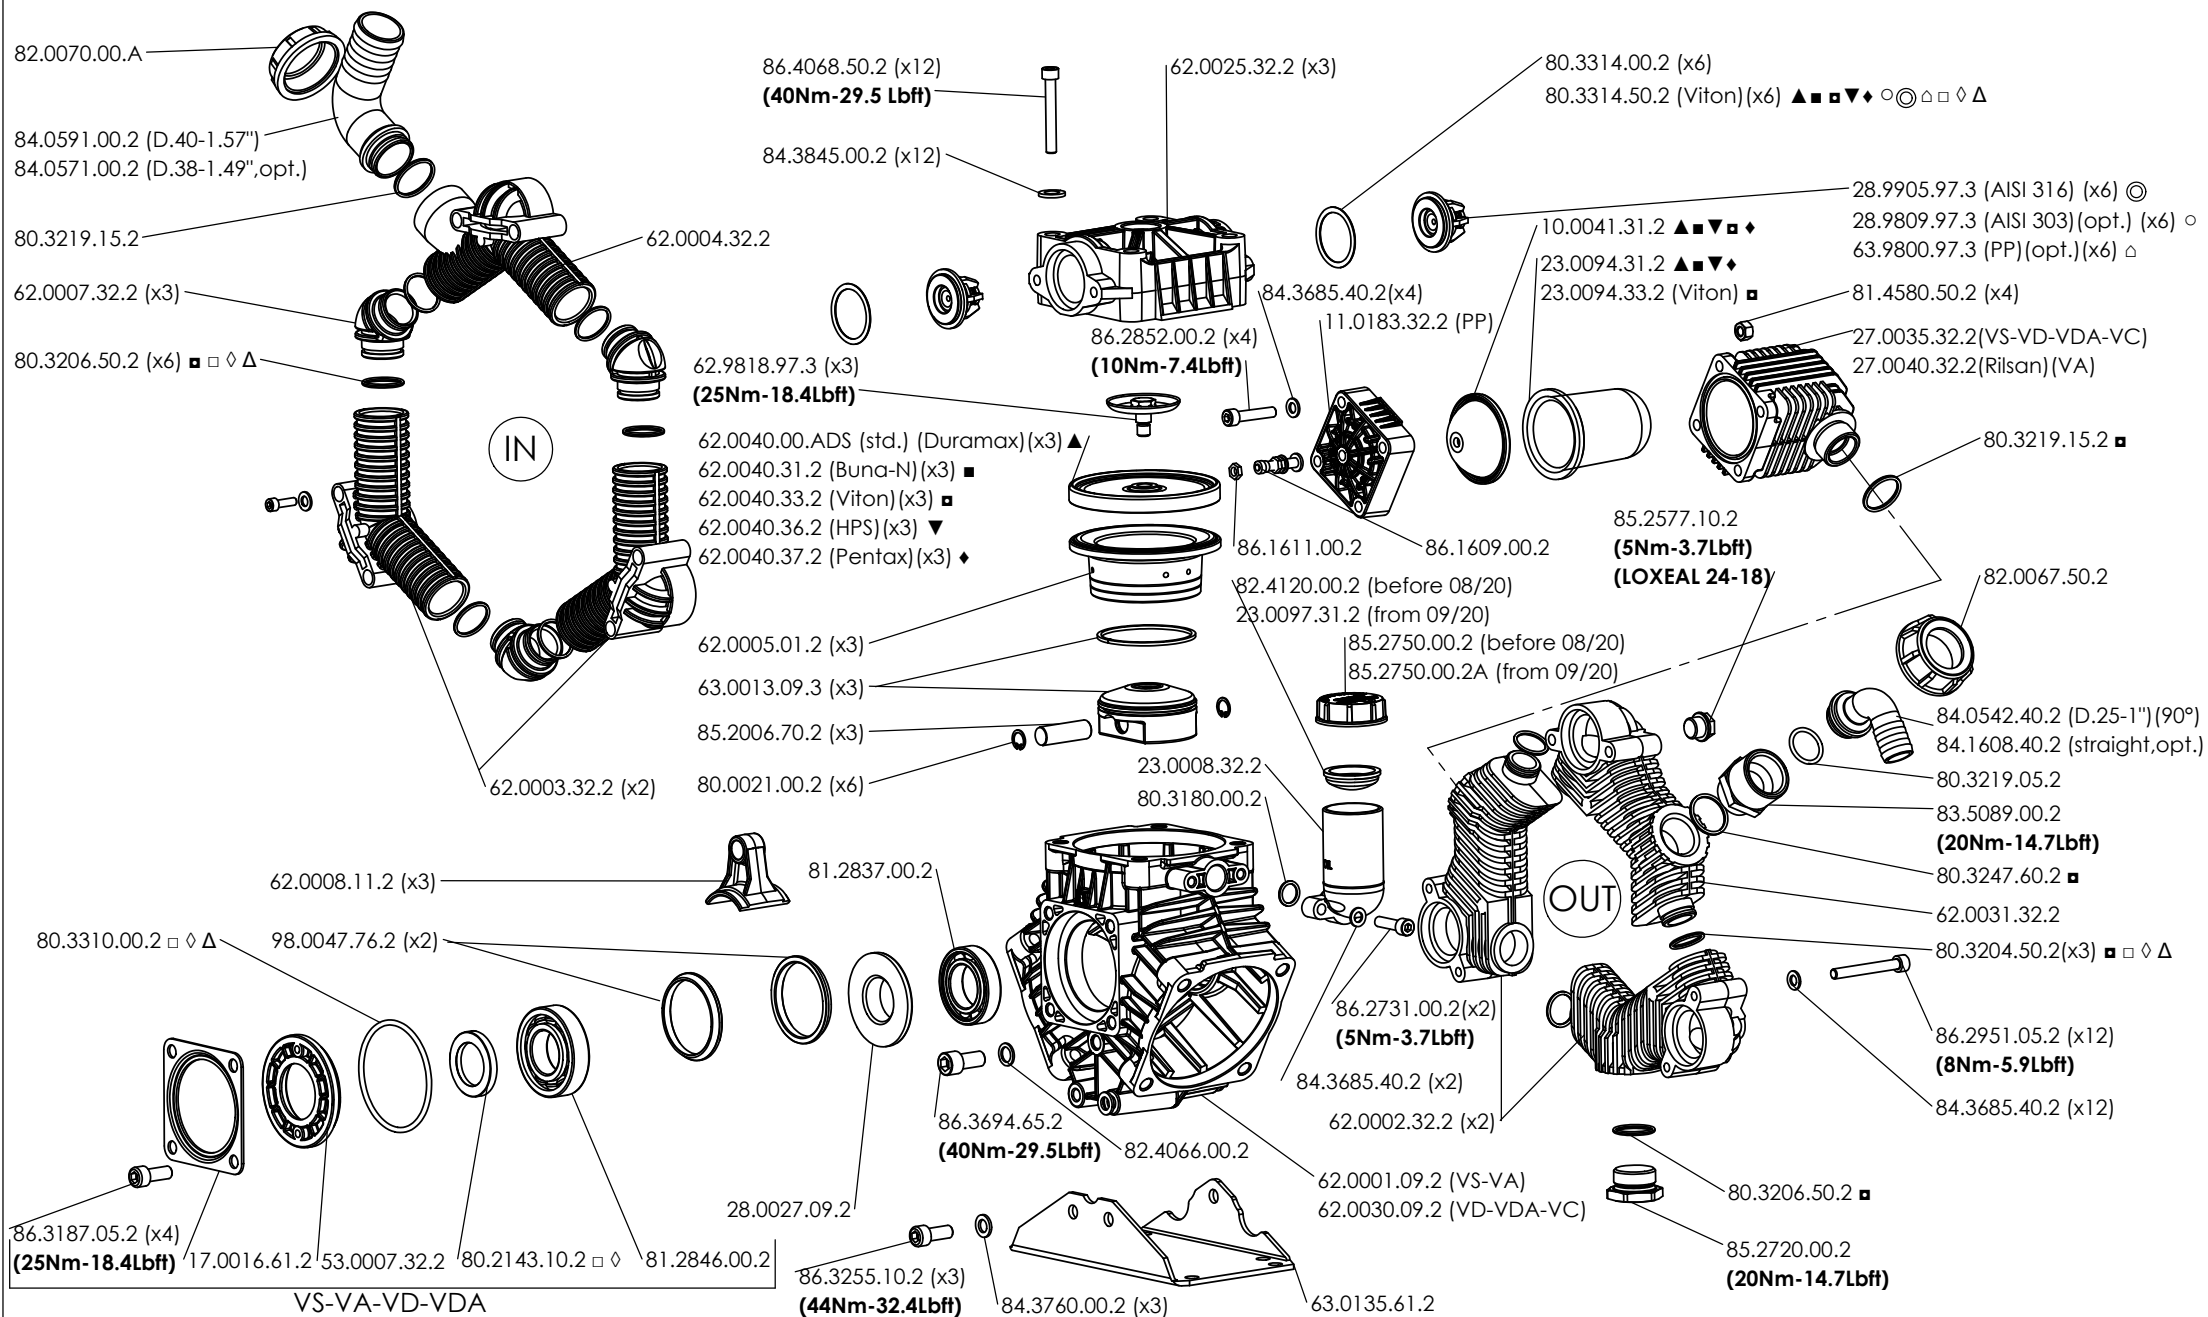


VS




VA

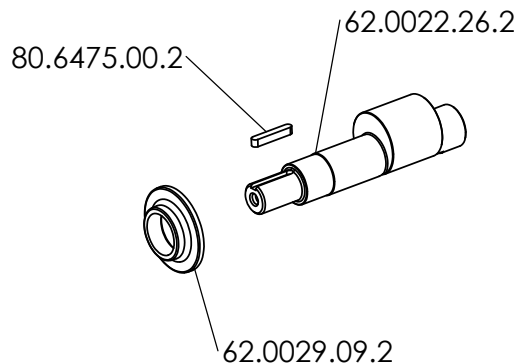


VD

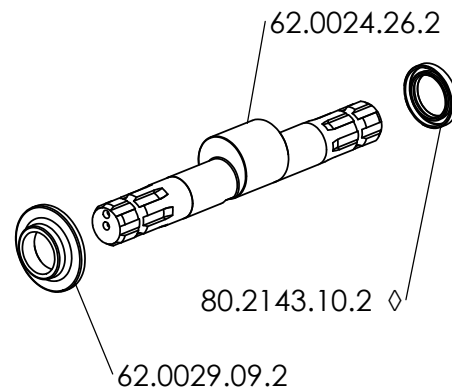


VDA

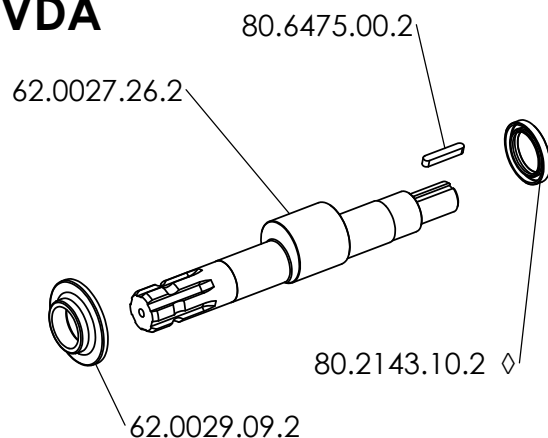

VC

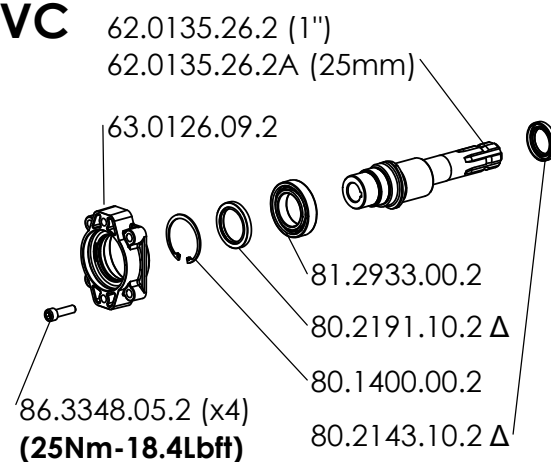


OLD VERSION (before 01/19)

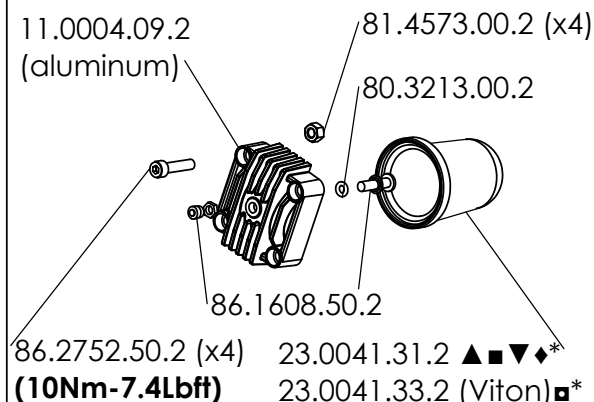

OPTIONAL


FRONT

31.1468.32.2 (L=135)
31.1482.32.2 (L=180)



SAFETY VALVE

24.3016.97.3



MATERIALE - MATERIAL STD. - OPT.	KIT MEMBRANE - DIAPHRAGMS KIT					KIT VALVOLE -VALVES KIT			KIT POMPA - PUMP KIT		
	DURAMAX STD.	BUNA-N OPT.	HPS OPT.	VITON OPT.	PENTAX OPT.	AISI 303 OPT.	AISI 316 STD.	PP OPT.	VS-VA	VD-VDA	VC
CODICE - CODE	62.9807.97.3DS* 62.9807.97.ADS	62.9806.97.3* 62.9806.97.A	62.9808.97.3* 62.9808.97.A	62.9809.97.3* 62.9809.97.A	62.9812.97.3* 62.9812.97.A	62.9805.97.3	62.9906.97.3	62.9804.97.3	62.9803.97.3	62.9820.97.3	62.9821.97.3
COMPONENTI COMPONENTS	▲	■	▼	■	◆	○	◎	⬆	□	◇	△

INFORMAZIONI UTILI - USEFUL INFORMATION				
OLIO - OIL	OLIO MOTORE O SEMIIDRAULICO SAE 30 MOTOR OIL OR SEMI-HYDRAULIC OIL			
PRESSIONE DI LAVORO OPERATING PRESSURE	2 ÷ 5	5÷10	10 ÷ 20	20 ÷ 50
ACCUMULATORE	2	2÷5	5÷7	6÷8

*per pompe con calotta accumulatore in alluminio (fino a 01/19)

* for pumps with aluminum ballast cover (before 01/19)