

COMPACT Series C 53.3 PP

Motorizzata - Powered



50.6 l/m
13.4 USGPM



max 50 BAR
725 P.S.I.

APPLICAZIONI - APPLICATIONS



ATOMIZZATORI
ATOMIZERS



CLEANING
CLEANING




NEBULIZZAZIONE
SPRAYING

SPECIAL TRADEMARK

EL EASYlube™

SCs SUPERCOOLINGsystem™

Sc SMARTcase™

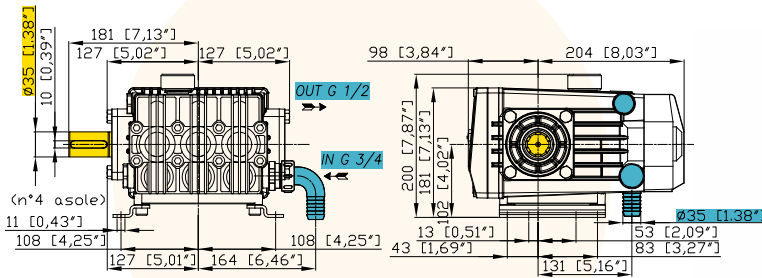

CARATTERISTICHE TECNICHE SPECIFICATIONS

550 g/min.
550 R.P.M.

Potenza - Power	4,9 KW	6.6 HP
Peso* - Weight*	20 Kg	44 lb
IN	25 mm	1" in
Pressione Min - Min Pressure	-0,15 BAR	- 2.17 P.S.I.
	-0,3 BAR (servizio discontinuo)	-0.435 P.S.I. (discontinuous service)
Pressione Max - Max Pressure	1 BAR	14.5 P.S.I.
OUT	G 1/2	
Max. Temperatura - Max. Temperature	60 °C	140 °F
Tipo olio - Oil type	SAE 30	
Capacità olio - Oil capacity	1,9 lt	0.5 U.S.G.

* Il peso si riferisce alla sola pompa senza motorizzazione.
* The weight is referred to just the pump without the motor.

TABELLA RENDIMENTI PERFORMANCE CHART

g/min R.P.M.	400		450		500		550	
BAR P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP
2 29	36,8 9,7	0,1 0,2	41,4 10,9	0,1 0,2	46,0 12,2	0,1 0,2	50,6 13,4	0,2 0,3
30 435	36,7 9,7	2,2 2,9	41,2 10,9	2,4 3,2	45,8 12,1	2,7 3,6	50,4 13,3	3,0 4,0
40 580	36,5 9,6	2,9 3,8	41,1 10,9	3,2 4,3	45,6 12,1	3,6 4,8	50,2 13,3	3,9 5,3
50 725	36,4 9,6	3,6 4,8	40,9 10,8	4,0 5,4	45,5 12,0	4,5 6,0	50,0 13,2	4,9 6,6

Versioni Versions	Motore elettrico Electric motor	C 53.3
PP	Trifase 5,5 KW Threephase 5,5 KW	53.8100.97.A