

COMPACT Series CK 120.1

115 l/m
30.4 USGPM

max 70 BAR
1015 P.S.I.

APPLICAZIONI - APPLICATIONS

ATOMIZZATORI
ATOMIZERS


CLEANING
CLEANING

SPECIAL TRADEMARK

EL EASYtube™

IS INTELLIseal™

Sc SMARTcase™

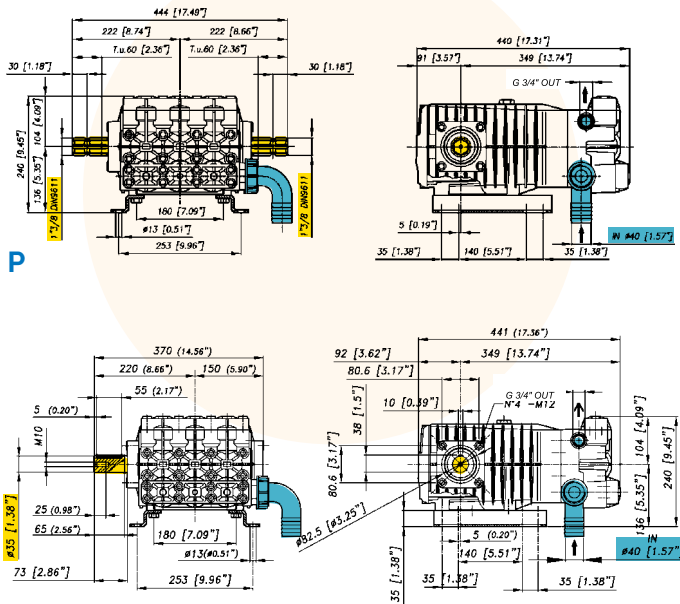

CARATTERISTICHE TECNICHE SPECIFICATIONS	550 g/min. 550 R.P.M.	
Potenza - Power	15,3 KW	20.4 HP
Peso - Weight	33 Kg	72,6 lb
IN	40 mm	1"9/16 in
Pressione Min - Min Pressure	-0,15 BAR	- 2.17 P.S.I.
	-0,3 BAR (servizio discontinuo)	-0.435 P.S.I. (discontinuous service)
Pressione Max - Max Pressure	1 BAR	14.5 P.S.I.
OUT	G 3/4	
Max. Temperatura - Max. Temperature	60 °C	140 °F
Tipo olio - Oil type	SAE 30	
Capacità olio - Oil capacity	2,8 lt	0.74 U.S.G.

TABELLA RENDIMENTI PERFORMANCE CHART		400		450		500		550	
g/min R.P.M.									
BAR P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	
2 29	83,6 22,1	0,3 0,4	94,1 24,9	0,4 0,5	104,5 27,6	0,4 0,5	115 30,4	0,5 0,6	
30 435	82,4 21,8	4,9 6,5	92,7 24,5	5,5 7,3	103 27,2	6,1 8,1	113,3 29,9	6,7 8,9	
50 725	81,5 21,5	8,0 10,7	91,6 24,2	9,0 12	101,8 26,9	10,0 13,4	112 29,6	11,0 14,7	
70 1015	80,8 21,3	11,1 14,8	90,9 24	12,5 16,7	101 26,7	13,9 18,5	111,1 29,4	15,3 20,4	

Versioni Versions

73.5002.97.A - P

73.5102.97.A - PP



Destro/Right

Sinistro/Left

Sinistro/Left

COMPACT Series

BERTOLINI
pumps