

# CK Series CK 170

174 l/m  
60 USGPM

max 60 BAR  
870 P.S.I.

## APPLICAZIONI - APPLICATIONS



ATOMIZZATORI  
ATOMIZERS



CLEANING  
CLEANING



## SPECIAL TRADEMARK

EL EASYtube™

Is INTELLiseal™

Sc SMARTcase™

SCs SUPERCoolINGsystem™

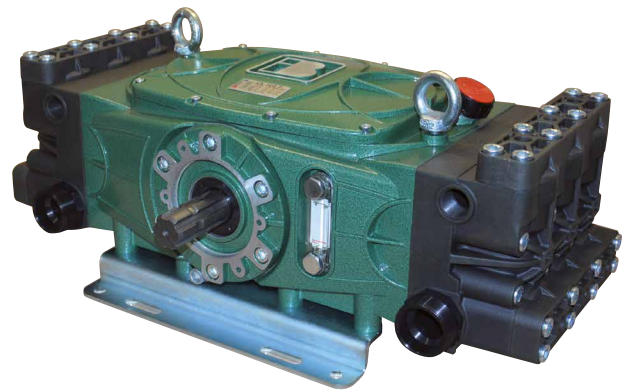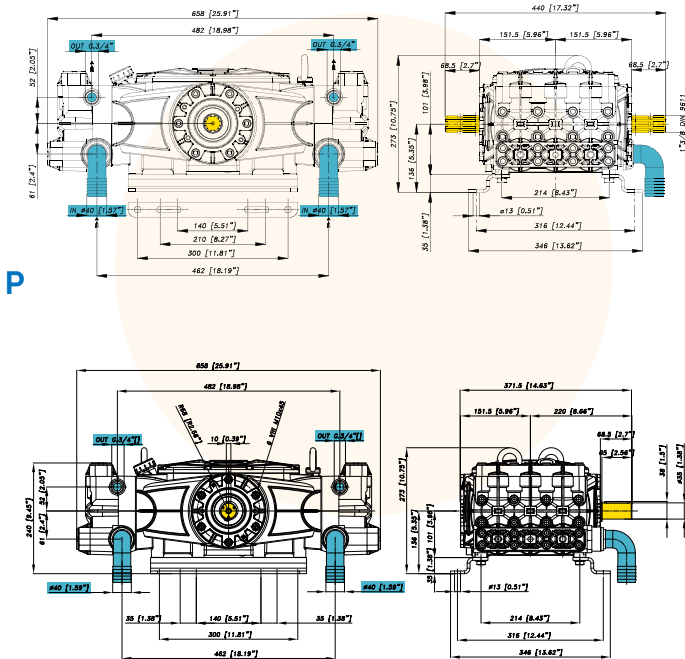

PP

CARATTERISTICHE TECNICHE SPECIFICATIONS	550 g/min. 550 R.P.M.	
Potenza - Power	20,1 KW	26.9 HP
Peso - Weight	39 Kg	85.8 lb
IN	2x40 mm	1"9/16 in
Pressione Min - Min Pressure	-0,15 BAR	- 2.17 P.S.I.
	-0,3 BAR (servizio discontinuo)	-0.435 P.S.I. (discontinuous service)
Pressione Max - Max Pressure	1 BAR	14.5 P.S.I.
OUT	G 3/4	
Max. Temperatura - Max. Temperature	60 °C	140 °F
Tipo olio - Oil type	SAE 30	
Capacità olio - Oil capacity	2,8 lt	0.74 U.S.G.

TABELLA RENDIMENTI PERFORMANCE CHART								
g/min R.P.M.	400		450		500		550	
BAR P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP
2 29	126,5 33,4	0,5 0,7	142,4 37,6	0,6 0,7	158,2 41,8	0,6 0,8	174,0 46,0	0,7 0,9
20 290	125,8 33,2	4,9 6,6	141,5 37,4	5,6 7,4	157,3 41,6	6,2 8,3	173,0 45,7	6,8 9,1
40 580	125,1 33,0	9,8 13,1	140,7 37,2	11,1 14,8	156,4 41,3	12,3 16,4	172,0 45,4	13,5 18,0
60 870	124,4 32,9	14,7 19,6	139,9 37,0	16,5 22,0	155,5 41,1	18,3 24,5	171,0 45,2	20,1 26,9

## Versioni Versions

76.7310.97.3 - P

76.7311.97.3 - PP



Anteriore/Front

Posteriore/Rear

Anteriore/Front