

CK Series CK 180

177 l/m
46.8 USGPM

max 60 BAR
870 P.S.I.

APPLICAZIONI - APPLICATIONS



ATOMIZZATORI
ATOMIZERS



CLEANING
CLEANING



SPECIAL TRADEMARK

EL EASYlube™

Is INTELLiseal™

Sc SMARTcase™

SCs SUPERCoolINGsystem™

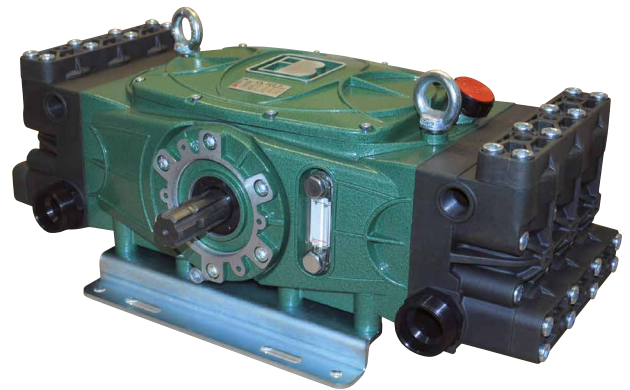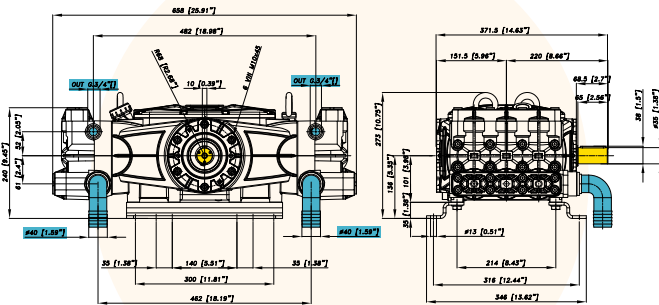

CARATTERISTICHE TECNICHE SPECIFICATIONS

550 g/min.
550 R.P.M.

| | | |
|-------------------------------------|------------------------------------|--|
| Potenza - Power | 23,9 KW | 32.0 HP |
| Peso - Weight | 39 Kg | 85.8 lb |
| IN | 2x40 mm | 1"9/16 in |
| Pressione Min - Min Pressure | -0,15 BAR | - 2.17 P.S.I. |
| | -0,3 BAR (servizio discontinuo) | -0.435 P.S.I. (discontinuous service) |
| Pressione Max - Max Pressure | 1 BAR | 14.5 P.S.I. |
| OUT | G 3/4 | |
| Max. Temperatura - Max. Temperature | 60 °C | 140 °F |
| Tipo olio - Oil type | SAE 30 | |
| Capacità olio - Oil capacity | 2,8 lt | 0.74 U.S.G. |

TABELLA RENDIMENTI PERFORMANCE CHART

| g/min R.P.M. | 600 | | 700 | | 800 | | 900 | |
|-----------------|---------------|----------------|---------------|----------------|---------------|----------------|---------------|----------------|
| | BAR P.S.I. | L/min USGPM | KW HP | L/min USGPM | KW HP | L/min USGPM | KW HP | L/min USGPM |
| 2 29 | 118,0 31,2 | 0,5 0,6 | 137,7 36,4 | 0,5 0,7 | 157,3 41,6 | 0,6 0,8 | 177,0 46,8 | 0,7 0,9 |
| 50 725 | 117,3 31,0 | 11,5 15,4 | 136,9 36,2 | 13,4 18,0 | 156,4 41,3 | 15,4 20,5 | 176,0 46,5 | 17,3 23,1 |
| 60 870 | 116,7 30,8 | 13,7 18,4 | 136,1 36,0 | 16,0 21,4 | 155,6 41,1 | 18,3 24,5 | 175,0 46,2 | 20,6 27,5 |
| 70 1015 | 116,0 30,6 | 15,9 21,3 | 135,3 35,8 | 18,6 24,9 | 154,7 40,9 | 21,3 28,4 | 174,0 46,0 | 23,9 32,0 |

Versioni Versions

76.7330.97.3 - PP

