

# CK Series CK 220



205,5 l/m  
54.3 USGPM



max 60 BAR  
870 P.S.I.

## APPLICAZIONI - APPLICATIONS



ATOMIZZATORI  
ATOMIZERS



CLEANING  
CLEANING

## SPECIAL TRADEMARK



EASylube™





INTELLiseal™



SMARTcase™



SUPERCoolingSystem™

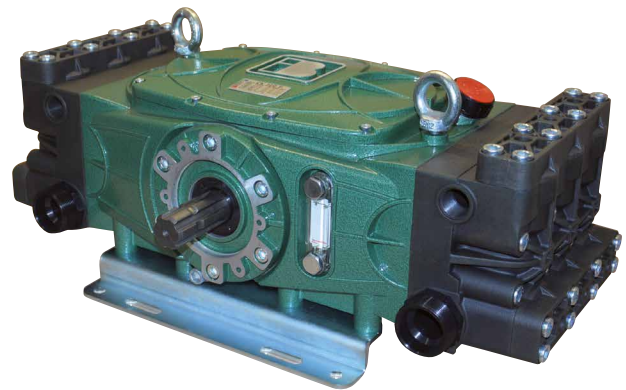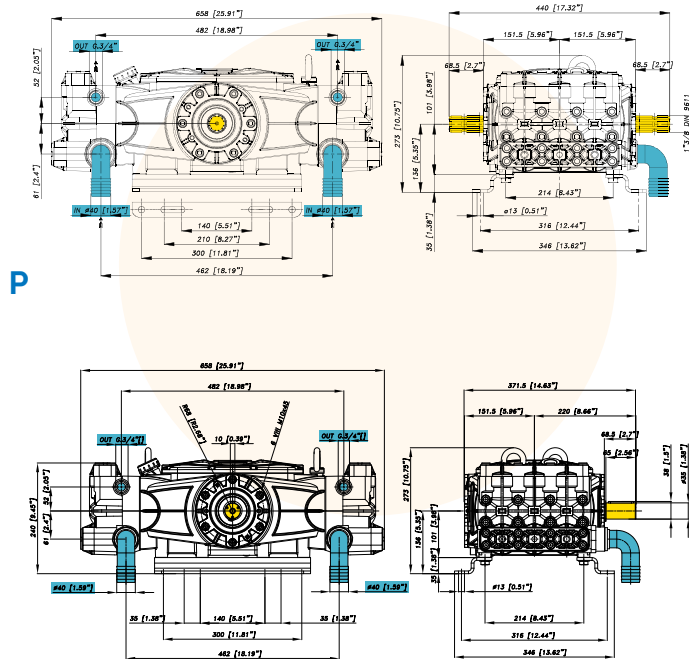

CARATTERISTICHE TECNICHE SPECIFICATIONS	550 g/min. 550 R.P.M.	
Potenza - Power	23,7 KW	31.6 HP
Peso - Weight	39 Kg	85.8 lb
IN	2x40 mm	1"9/16 in
Pressione Min - Min Pressure	-0,15 BAR	- 2.17 P.S.I.
	-0,3 BAR (servizio discontinuo)	-0.435 P.S.I. (discontinuous service)
Pressione Max - Max Pressure	1 BAR	14.5 P.S.I.
OUT	G 3/4	
Max. Temperatura - Max. Temperature	60 °C	140 °F
Tipo olio - Oil type	SAE 30	
Capacità olio - Oil capacity	2,8 lt	0.74 U.S.G.

TABELLA RENDIMENTI PERFORMANCE CHART								
g/min R.P.M.	400		450		500		550	
BAR P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP
2 29	149,5 39,5	0,6 0,8	168,1 44,4	0,7 0,9	186,8 49,4	0,7 1,0	205,5 54,3	0,8 1,1
20 290	148,4 39,2	5,8 7,8	166,9 44,1	6,6 8,8	185,5 49,0	7,3 9,7	204,0 53,9	8,0 10,7
40 580	147,6 39,0	11,6 15,5	166,1 43,9	13,0 17,4	184,5 48,8	14,5 19,4	203,0 53,6	15,9 21,3
60 870	146,2 38,6	17,2 23,0	164,5 43,4	19,4 25,9	182,7 48,3	21,5 28,8	201,0 53,1	23,7 31,6

## Versioni Versions

76.7318.97.3 - P

76.7319.97.3 - PP



Anteriore/Front

Posteriore/Rear

Anteriore/Front