

# CK Series CK 230

224 l/m  
59.2 USGPM

max 60 BAR  
870 P.S.I.

## APPLICAZIONI - APPLICATIONS



ATOMIZZATORI  
ATOMIZERS



CLEANING  
CLEANING

## SPECIAL TRADEMARK



EASYlube™





INTELLiseal™



SMARTcase™



SUPERCooling™

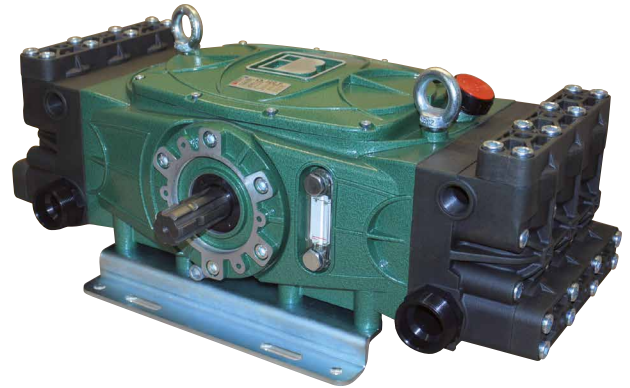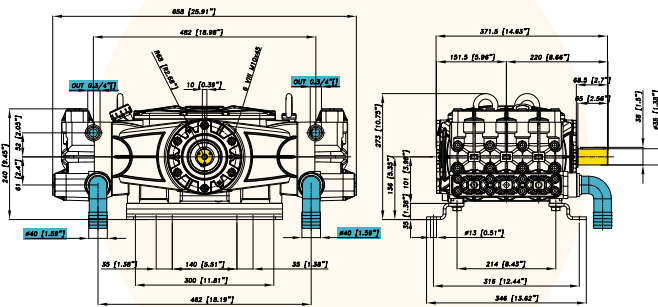

### CARATTERISTICHE TECNICHE SPECIFICATIONS

550 g/min.  
550 R.P.M.

|                                     |                                    |  |
|-------------------------------------|------------------------------------|--|
| Potenza - Power                     | 26,0 KW                            | 34.8 HP                                  |
| Peso - Weight                       | 39 Kg                              | 85.8 lb                                  |
| IN                                  | 2x40 mm                            | 1"9/16 in                                |
| Pressione Min - Min Pressure        | -0,15 BAR                          | - 2.17 P.S.I.                            |
|                                     | -0,3 BAR<br>(servizio discontinuo) | -0.435 P.S.I.<br>(discontinuous service) |
| Pressione Max - Max Pressure        | 1 BAR                              | 14.5 P.S.I.                              |
| OUT                                 | G 3/4                              |  |
| Max. Temperatura - Max. Temperature | 60 °C                              | 140 °F                                   |
| Tipo olio - Oil type                | SAE 30                             |  |
| Capacità olio - Oil capacity        | 2,8 lt                             | 0.74 U.S.G.                              |

### TABELLA RENDIMENTI PERFORMANCE CHART

| g/min<br>R.P.M. | 600           |                | 700           |                | 800           |                | 900           |                |
|-----------------|---------------|----------------|---------------|----------------|---------------|----------------|---------------|----------------|
|                 | BAR<br>P.S.I. | L/min<br>USGPM | KW<br>HP      | L/min<br>USGPM | KW<br>HP      | L/min<br>USGPM | KW<br>HP      | L/min<br>USGPM |
| 2<br>29         | 149,5<br>39,5 | 0,6<br>0,8     | 174,2<br>46,0 | 0,7<br>0,9     | 199,1<br>52,6 | 0,8<br>1,0     | 224,0<br>59,2 | 0,9<br>1,2     |
| 40<br>580       | 150,7<br>39,8 | 11,8<br>15,8   | 175,8<br>46,4 | 13,8<br>18,4   | 200,9<br>53,1 | 15,8<br>21,1   | 226,0<br>59,7 | 17,8<br>23,7   |
| 50<br>725       | 148,0<br>39,1 | 14,5<br>19,4   | 172,7<br>45,6 | 17,0<br>22,6   | 197,3<br>52,1 | 19,4<br>25,9   | 222,0<br>58,7 | 21,8<br>29,1   |
| 60<br>870       | 147,3<br>38,9 | 17,4<br>23,2   | 171,9<br>45,4 | 20,3<br>27,1   | 196,4<br>51,9 | 23,1<br>30,9   | 221,0<br>58,4 | 26,0<br>34,8   |

### Versioni Versions

76.7331.97.3 - PP

