

CK Series CK 240



225,5 l/m
59.6 USGPM



max 60 BAR
870 P.S.I.

APPLICAZIONI - APPLICATIONS



ATOMIZZATORI
ATOMIZERS



CLEANING
CLEANING

SPECIAL TRADEMARK



EASylube™





INTELLiseal™



SMARTcase™



SUPERCooling™

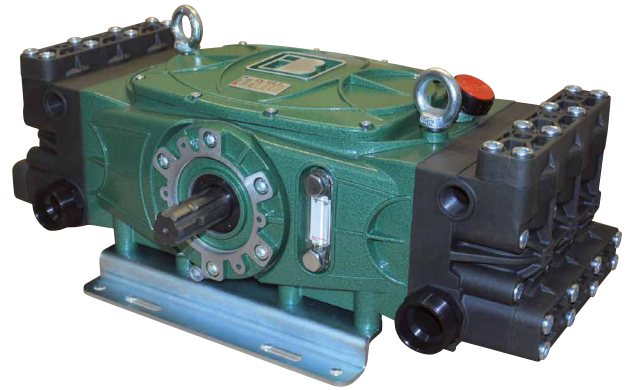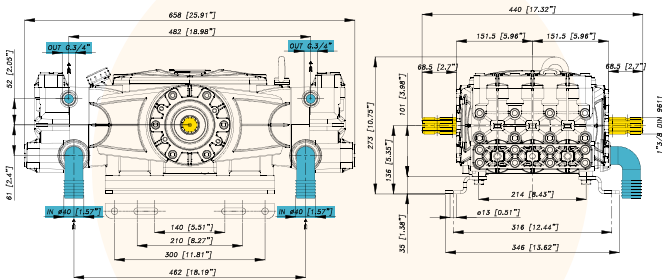

CARATTERISTICHE TECNICHE SPECIFICATIONS

550 g/min.
550 R.P.M.


Potenza - Power	26,2 KW	35.1 HP
Peso - Weight	39 Kg	85.8 lb
IN	2x40 mm	1"9/16 in
Pressione Min - Min Pressure	-0,15 BAR	- 2.17 P.S.I.
	-0,3 BAR (servizio discontinuo)	-0.435 P.S.I. (discontinuous service)
Pressione Max - Max Pressure	1 BAR	14.5 P.S.I.
OUT	G 3/4	
Max. Temperatura - Max. Temperature	60 °C	140 °F
Tipo olio - Oil type	SAE 30	
Capacità olio - Oil capacity	2,8 lt	0.74 U.S.G.

TABELLA RENDIMENTI PERFORMANCE CHART

g/min R.P.M.	400		450		500		550		
	BAR P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP
2 29		164,0 43,3	0,6 0,9	184,5 48,7	0,7 1,0	205,0 54,2	0,8 1,1	225,5 59,6	0,9 1,2
20 280		162,9 43,0	6,4 8,5	183,3 48,4	7,2 9,6	203,6 53,8	8,0 10,7	224,0 59,2	8,8 11,8
40 580		162,2 42,8	12,7 17,0	182,5 48,2	14,3 19,1	202,7 53,6	15,9 21,3	223,0 58,9	17,5 29,1
60 870		161,5 42,7	19,0 25,4	181,6 48,0	21,4 28,6	201,8 53,3	23,8 31,8	222,0 58,7	26,2 35,1

Versioni Versions

76.7322.97.3 - P



Anteriore/Front

Posteriore/Rear