

CK Series CK 270

272 l/m
71.9 USGPM

max 60 BAR
870 P.S.I.

APPLICAZIONI - APPLICATIONS



ATOMIZZATORI
ATOMIZERS



CLEANING
CLEANING



SPECIAL TRADEMARK

EL EASYtube™

Is INTELLiseal™

Sc SMARTcase™

SCs SUPERCoolINGsystem™

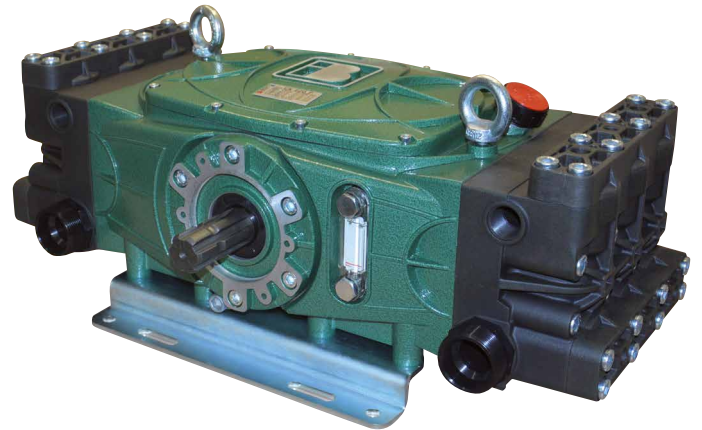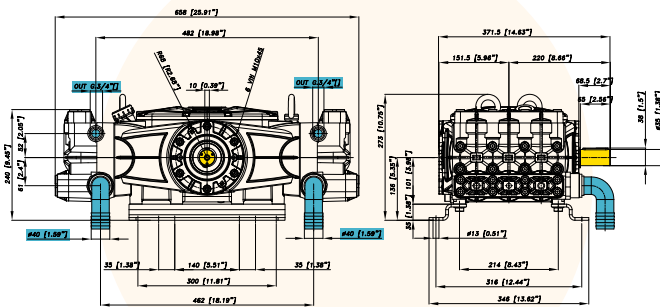

CARATTERISTICHE TECNICHE SPECIFICATIONS

550 g/min.
550 R.P.M.

Potenza - Power	31,7 KW	42.3 HP
Peso - Weight	39 Kg	85.8 lb
IN	2x40 mm	1"9/16 in
Pressione Min - Min Pressure	-0,15 BAR	- 2.17 P.S.I.
	-0,3 BAR (servizio discontinuo)	-0.435 P.S.I. (discontinuous service)
Pressione Max - Max Pressure	1 BAR	14.5 P.S.I.
OUT	G 3/4	
Max. Temperatura - Max. Temperature	60 °C	140 °F
Tipo olio - Oil type	SAE 30	
Capacità olio - Oil capacity	2,8 lt	0.74 U.S.G.

TABELLA RENDIMENTI PERFORMANCE CHART

g/min R.P.M.	600		700		800		900	
	BAR P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM
2 29	181,3 47,9	0,7 1,0	211,6 55,9	0,8 1,1	241,8 63,9	0,9 1,3	272,0 71,9	1,1 1,4
40 580	180,7 47,7	14,2 19,0	210,8 55,7	16,6 22,1	240,9 63,6	18,9 25,3	271,0 71,6	21,3 28,4
50 725	180,0 47,6	17,7 23,6	210,0 55,5	20,6 27,5	240,0 63,4	23,6 31,5	270,0 71,3	26,5 35,4
60 870	179,3 47,4	21,1 28,2	209,2 55,3	24,7 32,9	239,1 63,2	28,2 37,6	269,0 71,1	31,7 42,3

Versioni Versions

76.7332.97.3 - PP

