


COMPACT Series CK 73.1 P

	72 L/m 19 USGPM		max 70 BAR 1015 P.S.I.
-----------------------------------------------------------------------------------	--------------------	-------------------------------------------------------------------------------------	---------------------------

APPLICAZIONI - APPLICATIONS



ATOMIZZATORI
ATOMIZERS




CLEANING
CLEANING

SPECIAL TRADEMARK

EL EASYlube™

Is INTELLiseal™

Sc SMARTcase™

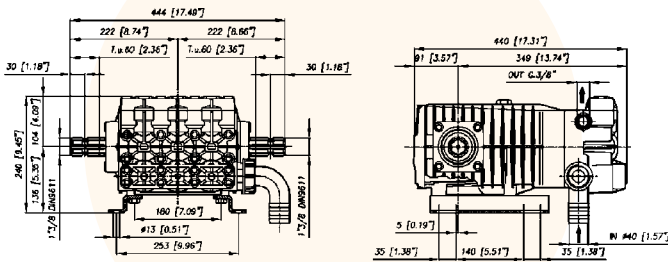

CARATTERISTICHE TECNICHE SPECIFICATIONS	550 g/min. 550 R.P.M.	
Potenza - Power	9,6 KW	12.9 HP
Peso* - Weight*	32 Kg	70.4 lb
IN	40 mm	1"9/16 in
Pressione Min - Min Pressure	-0,15 BAR	- 2.17 P.S.I.
	-0,3 BAR (servizio discontinuo)	-0.435 P.S.I. (discontinuous service)
Pressione Max - Max Pressure	1 BAR	14.5 P.S.I.
OUT	G 3/4 mm	
Max. Temperatura - Max. Temperature	60 °C	140 °F
Tipo olio - Oil type	SAE 30	
Capacità olio - Oil capacity	2,8 lt	0.74 U.S.G.

* Il peso si riferisce alla sola pompa senza motorizzazione.
* The weight is referred to just the pump without the motor.

TABELLA RENDIMENTI PERFORMANCE CHART								
g/min R.P.M.	400		450		500		550	
BAR P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP
2 29	52,4 13,8	0,2 0,3	58,9 15,6	0,2 0,3	65,5 17,3	0,2 0,3	72,0 19,0	0,3 0,4
30 435	51,3 13,5	3,0 4,0	57,7 15,2	3,4 4,5	64,1 16,9	3,8 5,0	70,5 18,6	4,2 5,5
50 725	52,0 13,7	5,1 6,8	58,5 15,5	5,7 7,7	65,0 17,2	6,4 8,5	71,5 18,9	7,0 9,4
70 1015	50,9 13,5	7,0 9,3	57,3 15,1	7,9 10,5	63,6 16,8	8,7 11,7	70,0 18,5	9,6 12,9

Versioni Versions	Motore orbitale Orbital motor	CK 73.1
P	100 cc	73.9231.97.3