

IDB Series

IDB 1100



110 l/m
29.1 USGPM



max 50 BAR
725 P.S.I.

APPLICAZIONI - APPLICATIONS



ATOMIZZATORI
ATOMIZERS

MEMBRANE - MEMBRANES





DESMOPAN

DURAMAX

HPS

VITON

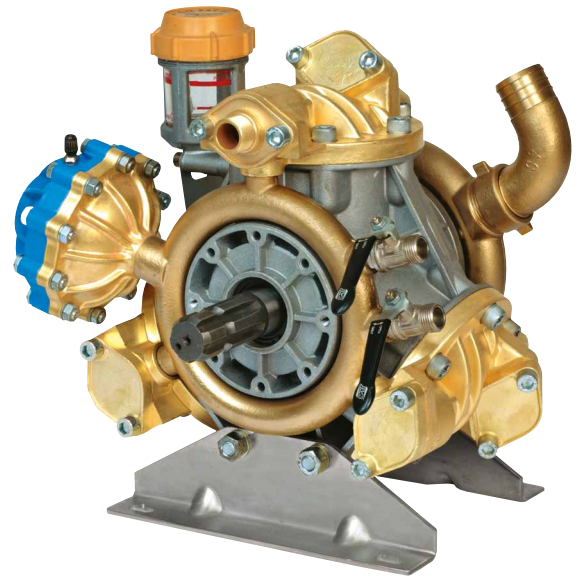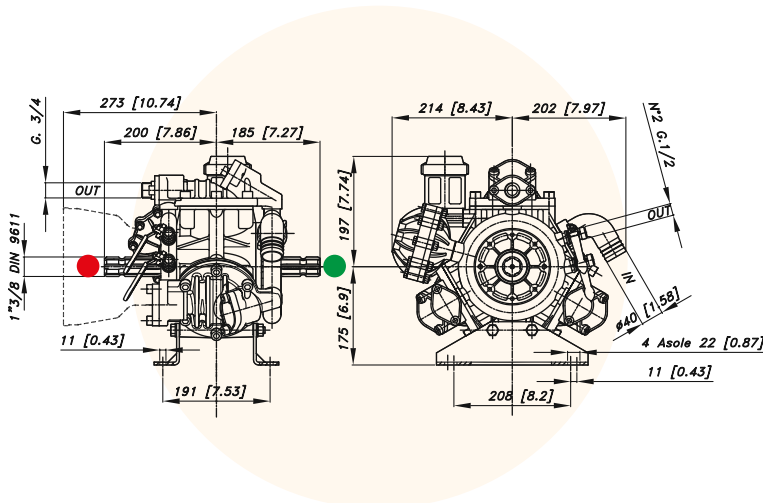


CARATTERISTICHE TECNICHE SPECIFICATIONS	550 g/min. 550 R.P.M.	
Potenza - Power	10,2 KW	13.9 HP
Peso - Weight	38,9 Kg	85.6 lb
IN	40 mm	1 9/16 in
Pressione Min - Min Pressure	-0,15 BAR	- 2.17 P.S.I.
	-0,3 BAR (servizio discontinuo)	-0.435 P.S.I. (discontinuous service)
Pressione Max - Max Pressure	1 BAR	14.5 P.S.I.
OUT	G 3/4	
Max. Temperatura - Max. Temperature	60 °C	140 °F
Tipo olio - Oil type	SAE 30	
Capacità olio - Oil capacity	1,81 lt	0.48 U.S.G.

TABELLA RENDIMENTI PERFORMANCE CHART								
g/min R.P.M.	400		450		500		550	
BAR P.S.I.	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP
2 29	80 21,1	0,3 0,4	90 23,8	0,4 0,5	100 26,4	0,4 0,5	110 29,1	0,4 0,6
20 290	79 20,8	3,1 4,1	88 23,3	3,5 4,6	98 25,9	3,9 5,2	108 28,5	4,2 5,7
40 580	77 20,4	6,1 8,1	87 22,9	6,8 9,1	96 25,5	7,6 10,1	106 28,0	8,3 11,1
50 725	76 20	7,4 9,9	85 22,5	8,4 11,2	95 25,0	9,3 12,4	104 27,5	10,2 13,9

Versioni Versions

48.5000.97.3 - VD

48.5010.97.3 - VM

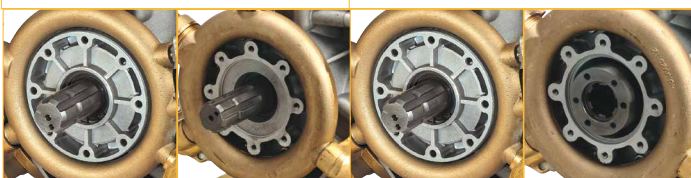

Anteriore/Front

Posteriore/Rear

Anteriore/Front

Posteriore/Rear

