

# PA Series PA 730.1

70 L/m  
18.5 USGPM

max 40 BAR  
580 P.S.I.

## APPLICAZIONI - APPLICATIONS



DISINFESTAZIONE  
DISINFESTATION



ATOMIZZATORI  
ATOMIZERS

## MEMBRANE - MEMBRANES





DESMOPAN

DURAMAX


HPS

VITON

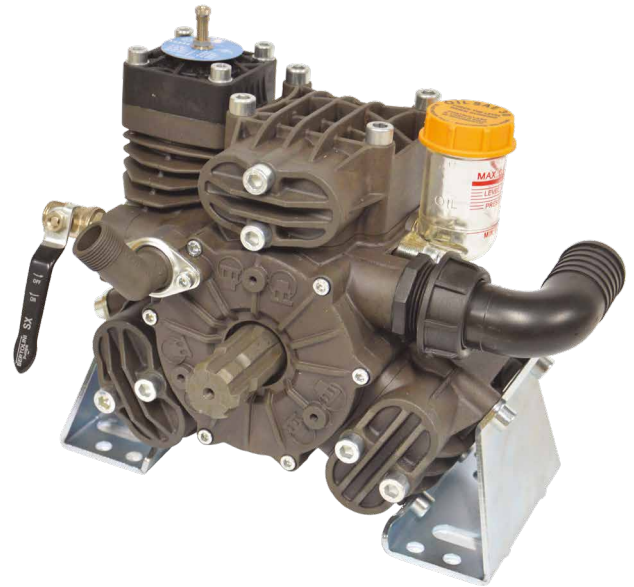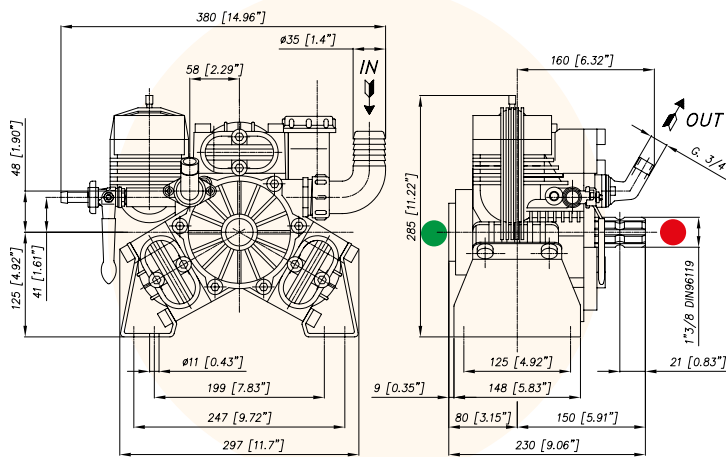

CARATTERISTICHE TECNICHE SPECIFICATIONS	550 g/min. 550 R.P.M.		TABELLA RENDIMENTI PERFORMANCE CHART								
<b>Potenza - Power</b>	<b>5,3 KW</b>	<b>7 HP</b>	<b>g/min R.P.M.</b>	<b>400</b>		<b>450</b>		<b>500</b>		<b>550</b>	
<b>Peso - Weight</b>	<b>15 Kg</b>	<b>33 lb</b>	<b>BAR P.S.I.</b>	<b>L/min USGPM</b>	<b>KW HP</b>	<b>L/min USGPM</b>	<b>KW HP</b>	<b>L/min USGPM</b>	<b>KW HP</b>	<b>L/min USGPM</b>	<b>KW HP</b>
<b>IN</b>	<b>Ø 35 mm</b>	<b>Ø 1 3/8 in</b>	<b>2</b>	<b>50,9</b>	<b>0,2</b>	<b>57,3</b>	<b>0,2</b>	<b>63,6</b>	<b>0,2</b>	<b>70</b>	<b>0,3</b>
<b>Pressione Min - Min Pressure</b>	<b>-0,15 BAR</b>	<b>- 2.17 P.S.I.</b>	<b>29</b>	<b>13,5</b>	<b>0,3</b>	<b>15,1</b>	<b>0,3</b>	<b>16,8</b>	<b>0,3</b>	<b>18,5</b>	<b>0,4</b>
	<b>-0,3 BAR (servizio discontinuo)</b>	<b>-0.435 P.S.I. (discontinuous service)</b>	<b>20</b>	<b>50</b>	<b>2</b>	<b>56,3</b>	<b>2,2</b>	<b>62,5</b>	<b>2,5</b>	<b>68,8</b>	<b>2,7</b>
<b>Pressione Max - Max Pressure</b>	<b>1 BAR</b>	<b>14.5 P.S.I.</b>	<b>290</b>	<b>13,2</b>	<b>2,6</b>	<b>14,9</b>	<b>3</b>	<b>16,5</b>	<b>3,3</b>	<b>18,2</b>	<b>3,6</b>
<b>OUT</b>	<b>G 3/4</b>		<b>30</b>	<b>49,4</b>	<b>2,9</b>	<b>55,6</b>	<b>3,3</b>	<b>61,7</b>	<b>3,6</b>	<b>67,9</b>	<b>8,3</b>
<b>Max. Temperatura - Max. Temperature</b>	<b>60 °C</b>	<b>140 °F</b>	<b>435</b>	<b>13</b>	<b>3,9</b>	<b>14,7</b>	<b>4,4</b>	<b>16,3</b>	<b>4,9</b>	<b>17,9</b>	<b>5,3</b>
<b>Tipo olio - Oil type</b>	<b>SAE 30</b>		<b>40</b>	<b>48,8</b>	<b>3,8</b>	<b>54,9</b>	<b>4,3</b>	<b>61</b>	<b>4,8</b>	<b>67,1</b>	<b>5,3</b>
<b>Capacità olio - Oil capacity</b>	<b>0,5 lt</b>	<b>0.13 U.S.G.</b>	<b>580</b>	<b>12,9</b>	<b>5,1</b>	<b>14,5</b>	<b>5,8</b>	<b>16,1</b>	<b>6,4</b>	<b>17,7</b>	<b>7</b>

## Versioni Versions

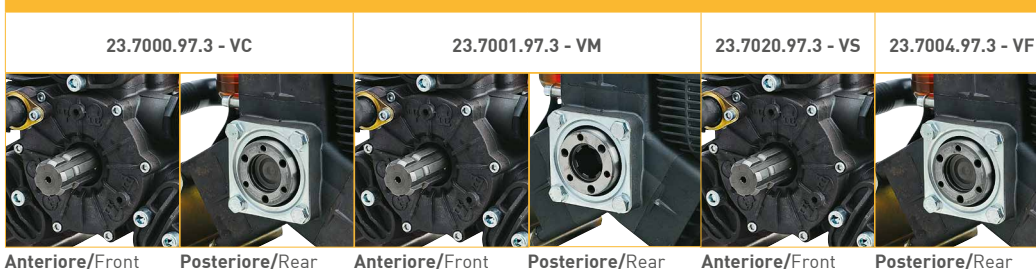

● ● ● ● ● ●