

Strip Mini Poly Series

Poly 2030.1 RTE.1

31 L/m
8.2 USGPM


max 20 BAR
290 P.S.I.

APPLICAZIONI - APPLICATIONS

 AGRICOLTURA AGRICULTURE	 ORTICOLTURA HORTICULTURE	 CARRIOLE WHEELBARROWS
 GIARDINAGGIO GARDENING	 SERRE GREENHOUSES	 DISINFESTAZIONE DISINFESTATION

MEMBRANE - MEMBRANES

 BUNA	 VITON	 DESKOPAN
---	--	---

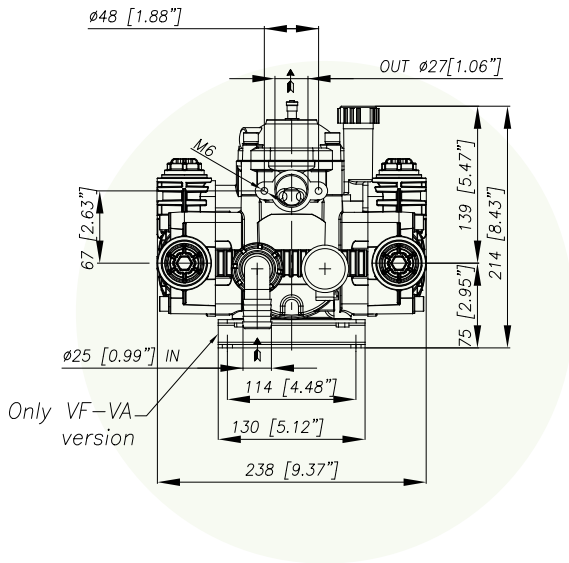

CARATTERISTICHE TECNICHE SPECIFICATIONS	650 g/min. 650 R.P.M.	
Potenza - Power	1,2 KW	1.6 HP
Peso* - Weight*	5,6 Kg	12.3 lb
IN	Ø 25 mm	Ø 1" in
Pressione Min - Min Pressure	-0,1 BAR	-1.45 P.S.I.
Pressione Max - Max Pressure	1 BAR	14.5 P.S.I.
OUT	Ø 8 mm	Ø 5/16" in
Max. Temperatura - Max. Temperature	60 °C	140 °F
Tipo olio - Oil type	SAE 30	
Capacità olio - Oil capacity	0,7 lt	0.18 U.S.G.

TABELLA RENDIMENTI PERFORMANCE CHART									
g/min R,P,M,	500		550		600		650		
	BAR P,S,I,	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP	L/min USGPM	KW HP
2	23,8	0,11	26,2	0,12	28,6	0,13	31,0	0,14	
29	6,3	0,1	6,9	0,2	7,6	0,2	8,2	0,2	
10	22,3	0,5	24,5	0,5	26,8	0,6	29,0	0,6	
145	5,9	0,7	6,5	0,7	7,1	0,8	7,7	0,9	
15	21,5	0,7	23,7	0,8	25,8	0,9	28,0	0,9	
217,5	5,7	1,0	6,3	1,1	6,8	1,2	7,4	1,2	
20	20,8	0,9	22,8	1,0	24,9	1,1	27,0	1,2	
290	5,5	1,2	6,0	1,4	6,6	1,5	7,1	1,6	

* Il peso si riferisce alla sola pompa senza motorizzazione.
* The weight is referred to just the pump without the motor.

Versioni Versions	Motore elettrico Electric motor	2030.1
RTE.1	Monofase 1,5 KW Single-phase 1,5 KW	94.8660.97.ADS
	Monofase 2,2 KW Single-phase 2,2 KW	94.74762.97.3
	Trifase 1,5 KW Threephase 1,5 KW	94.7461.97.ADS
	Corrente Continua 12 V 0,6 KW Direct Current 12 V 0,6 KW	94.7464.97.ADS