

Regolatori di pressione / Pressure regulators

# VD 80/150 (80 L/Min-150 BAR)

## VD 80/150 (80 L/Min-150 BAR)

80 L/min  
21 USGPM

max 150 BAR  
2200 P.S.I.



APPLICAZIONI - APPLICATIONS

AGRICOLTURA  
AGRICULTURE

SPRAYER  
SPRAYER

DISINFESTAZIONE  
DISINFESTATION

ATOMIZZATORI  
ATOMIZERS

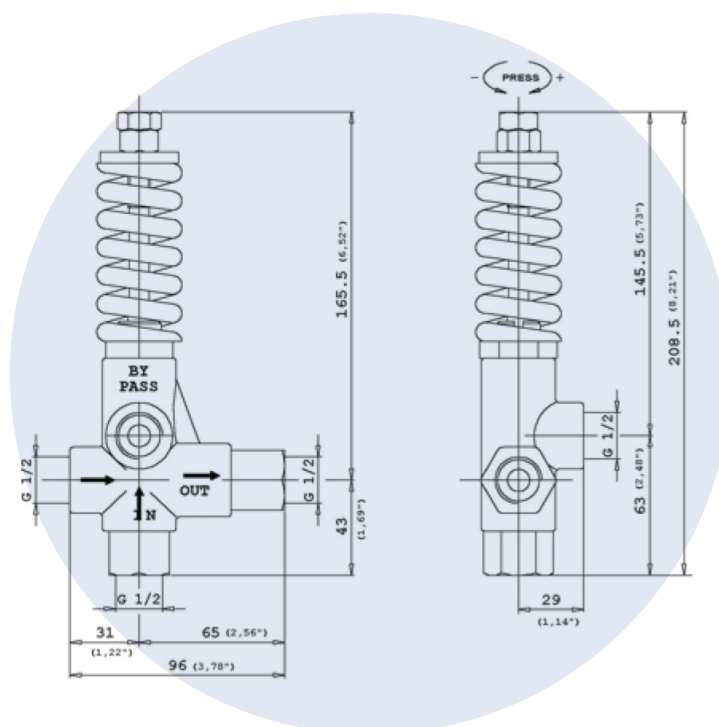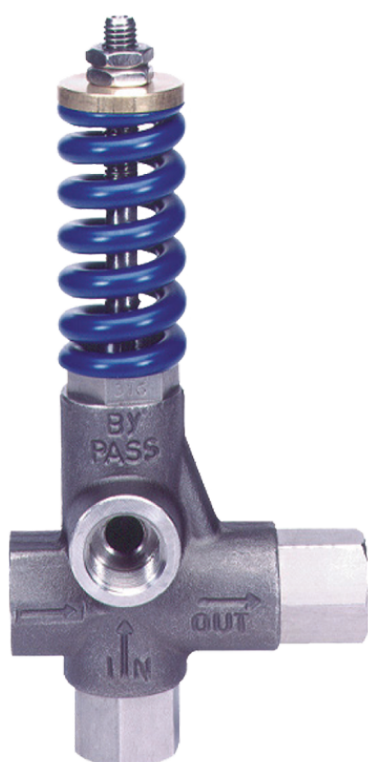

VALVOLE REGOLAZIONE PRESSIONE CON BY-PASS ESTERNO  
UNLOADER VALVES WITH EXTERNAL BY-PASS  
RÉGULATEURS DE PRESSION SÉPARÉS DE LA CULASSE  
VÁLVULAS DE REGULACIÓN DE PRESIÓN

TEMPERATURA MAX: 60°C - 140°F  
MAX TEMPERATURE: 60°C - 140°F  
TEMPÉRATURE MAXI: 60°C - 140°F  
TEMPERATURA MÁX: 60°C - 140°F

### VD 80/150

Valvole regolazione pressione in acciaio inossidabile con by-pass esterno - Stainless steel unloader valves with external by-pass  
Régulateurs de pression en acier inox séparés de la culasse - Válvulas de regulación de presión en acero inox

Cod. Part Number	Modello Model	Pressione Max Max Pressure		Portata Flow		Attacco pompa Port size	Uscita Outlet	Scarico By-pass	Peso Weight	
		bar	psi	l/min	GPM				Kg	lbs
06.9915.97.3	VD 80/150 (AISI 316)	150	2200	80	21	1/2 BSP - F	1/2 BSP - F	1/2 BSP - F	1.2	2.7

Temperatura max: 90°C - 195°F - Max temperature: 90°C - 195°F - Température maxi: 90°C - 195°F - Temperatura máx: 90°C - 195°F