

Regolatori di pressione / Pressure regulators

VS 250-2 (24 L/Min-250 BAR)

VS 250-2 (24 L/Min-250 BAR)



24 l/min
6,3 USGPM



max 250 BAR
3600 P.S.I.

APPLICAZIONI - APPLICATIONS



AGRICOLTURA
AGRICULTURE




SPRAYER
SPRAYER



DISINFESTAZIONE
DISINFESTATION



ATOMIZZATORI
ATOMIZERS

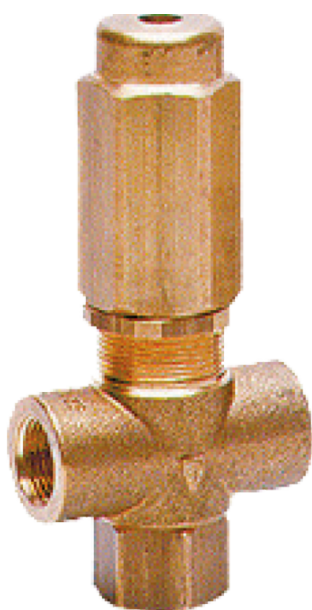

VALVOLE DI SICUREZZA
SAFETY VALVES
SOUPAPES DE SÉCURITÉ
VÁLVULAS DE SEGURIDAD

Temperatura max: 90°C 195°F
Max temperature: 90°C 195°F
Température maxi: 90°C 195°F
Temperatura máx: 90°C - 195°F

VS 250 - 2

Cod. Part Number	Modello Model	Pressione Max Max Pressure		Portata Flow		Attacco pompa Port size	Scarico By-pass	Peso Weight	
		bar	psi	l/min	GPM			Kg	lbs
86.1675.00.2	VS 250-2 BY-PASS 1/4	250	3600	24	6.3	N°2 3/8 BSP - F	1/4 BSP - F	0.46	1.0
86.1675.00.2	VS 250-2 BY-PASS 3/8	250	3600	24	6.3	N°2 3/8 BSP - F	3/8 BSP - F	0.46	1.0