

# Strip Mini Poly Series Strip Pump DE



17 L/m  
4.5 USGPM

max 20 BAR  
290 P.S.I.

## APPLICAZIONI - APPLICATIONS



## MEMBRANE - MEMBRANES

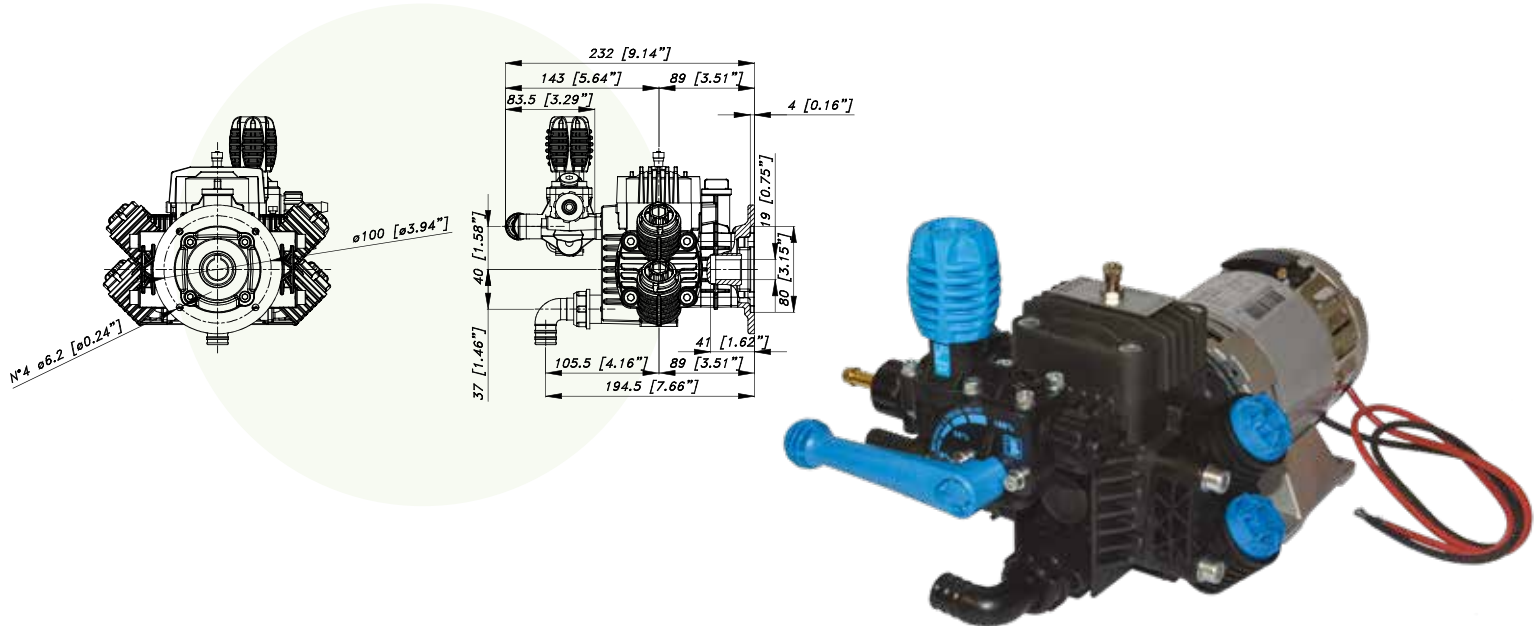

CARATTERISTICHE TECNICHE SPECIFICATIONS		
Potenza - Power	0,67 KW	0.89 HP
Peso* - Weight*	3,5 Kg	7.7 lb
IN	Ø 20 mm	Ø 13/15" in
Pressione Min - Min Pressure	-0,1 BAR	- 1.45 P.S.I.
Pressione Max - Max Pressure	1 BAR	14.5 P.S.I.
OUT	Ø 8 mm	Ø 5/16" in
Max. Temperatura - Max. Temperature	60 °C	140 °F
Tipo olio - Oil type	SAE 30	
Capacità olio - Oil capacity	0,075 lt	0.019 U.S.G.

\* Il peso si riferisce alla sola pompa senza motorizzazione.  
\* The weight is referred to just the pump without the motor.

TABELLA RENDIMENTI PERFORMANCE CHART			
g/min R.P.M.	3450		
BAR P.S.I.	L/min USGPM	KW HP	
2 29	18,0 4,8	0,08 0,11	
10 145	17,0 4,5	0,38 0,51	
15 217,5	16,0 4,2	0,53 0,71	
20 290	15,0 4,0	0,67 0,89	

Versioni Versions	Motore elettrico Electric motor	STRIP
DE80	Monofase 0,8 KW [C] Single-phase 0,8 KW [C]	11.7008.97.3
	Monofase 0,8 KW [C] Single-phase 0,8 KW [C]	11.7015.97.3
DE71	Monofase 0,8 KW [B] Single-phase 0,8 KW [B]	11.7016.97.3